

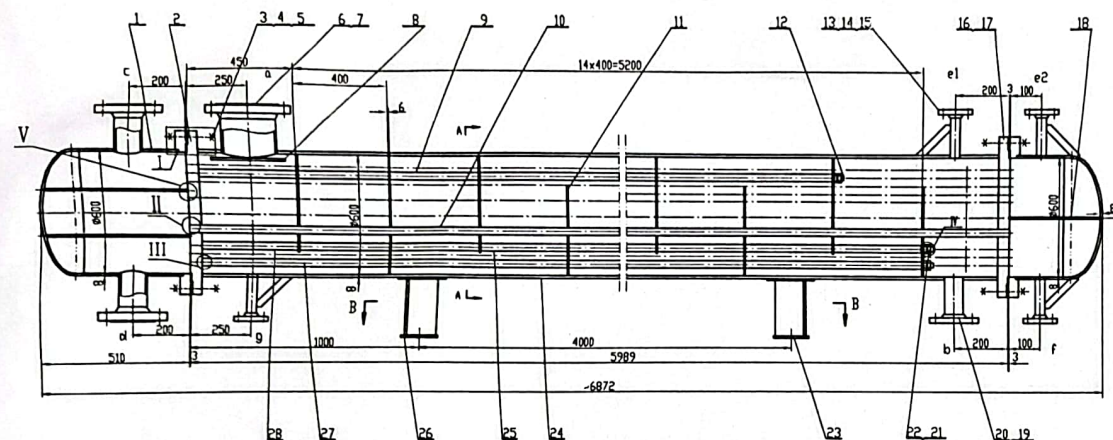


脱酚油冷凝冷却器E0301

重量: 3251Kg

根据图纸制作
材质改为316L。

张云
2024.1.28

[illegible]

图 2						
序号	设备名称/尺寸	设备型号/尺寸	连接点名称	管径	管道名称	备注/说明
a	250	16	HG/T20592-2009 S0	RF	燃油气进口	200
b	80	16	HG/T20592-2009 S0	RF	燃油出口	50
c	125	16	HG/T20592-2009 S0	RF	冷却水进口	200
d	125	16	HG/T20592-2009 S0	RF	冷却水出口	200
e+2	25	16	HG/T20592-2009 S0	RF	蒸汽口	50
f	25	16	HG/T20592-2009 S0	RF	放空口	50
g	25	16	HG/T20592-2009 S0	RF	放空口	50

13	GB6163	HP 012K3.5	20	2	0.32	0.64	L=120
12	SBC20W4-127-4	HP L-5260	Q235-A	2	0.3	0.6	
11	SBC20W4-127-3	HP	Q235-A	14	6.64	0.02	
10	GB/T1863	HP 025x2.5 L=4000	20	212	0.32	0.64	
9		HP 025x2.5	20	24	11	26.4	L=794
8		HP 025x2.5x6.5	Q235-A	1	1.42		
7	HG/T20592-2009	HP SQ ZS401-W RF S-9	20 II	1	0.0		
6	GB6170	HP 027x30	20	1	0.3		L=231
5	JB/T4747-2000	HP M20X5.5-A	40#	48	0.31	17.36	
4	JB/T4747-2000	HP 606-1.0	HP450	1			
3	GB/T1670-2000	HP M20	35	96	0.052	4.95	
2	SBC20W4-127-2	HP 1	16#	1	110		
1	SBC20W4-127-1	HP 1	HP 1	1	153		

[illegible]